CON-AKTIV®

Sockets



Emphasis





Indispensable for the working area in the kitchen: the individual power supply. CON-AKTIV® offers switch and socket units that are absolutely dependable in function and attractive in design. Within easy reach for toasters, kettles, food processors or whatever else needs electricity.

Whether planning a new kitchen or retrofitting an existing one – CON-AKTIV® has all the solutions. The range of retractable, wall-mounted or surface-mounted switch and socket variants in brushed stainless steel, glass and matt aluminium leaves plenty of scope for the optimum socket configuration.

Single or double USB chargers supply smartphone, tablet and co. with the right energy in situ. And with some models, integrated switches even control the LED kitchen lighting.

CON-AKTIV® Sockets

Safe, flexible and easy to install









CON-AKTIV®

Surface mounted, corner sockets

Shapely problem solvers Page 423–436

CON-AKTIV®

Retracting sockets

Ready to use in a jiffy Page 437–446

CON-AKTIV®
Flush mounted sockets
Perfectly integrated

Page 447-466

Socket

CON-AKTIV® Surface mounted, corner_sockets

Shapely problem solvers




Mira Quad glass USB A	Page 424
Mira corner glass	Page 424
Mira corner glass USB A	Page 425
Mira glass USB A	Page 425
Mira ES1	Page 426
Mira corner	Page 427
Mira corner small USB A/C	Page 427
Mira corner glass USB C Snap	Page 428
Mira corner small S	Page 428
Mira ES2/ES3/ES4	Page 428
Mira triangle	Page 429
Mira wall	Page 429-430
Casia 2K	Page 430
Casia 2L	Page 430
Mira ES5	Page 430
Corner double socket	Page 431
Mira WA1	Page 431
Mira BS1	Page 431
Mira ES1 with cover	Page 431
Mira KST1	Page 431
Evoline® Dock	Page 432
Evoline® Wing	Page 433
Muzak column	Page 434
Double electrical box	Page 434
Corner box 3	Page 435



Mira glass

High-quality, functional and flexible. The socket elements of the series Mira Glass set new standards in design, materials and equipment. Fine brushed stainless steel, combined with white or black printed glass surfaces integrate themselves between the worktop and wall cabinet in any modern kitchen, even in case of subsequent electrification. Optionally equipped with earthing contact sockets and USB charger, they meet today's requirements in terms of design and function.








Mira Quad glass USB A



Socket element. 3-fold. With double USB charger (base station). Front in printed and scratch-resistant glass.

- stainless steel housing
- 230 V/16 A 2 x USB charger type A, 5 VDC, IA/I out: 2 x 1050 mA
- 200 x 170 x 65.1 mm (H x W x D)
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back below

7053058 stainless steel/glass white	178.64 €
7053127 stainless steel/glass black	178.64 €

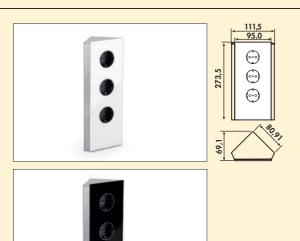


Mira corner glass



Corner socket element, 3-fold. Front in printed and scratch-resistant glass, for 90° corner.

- stainless steel housing
- 230 V/16 A
- $-273.5 \times 80.91 \times 80.91 \text{ mm} (H \times W \times D)$
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back

7053057 stainless steel/glass white	134.46 €
7053128 stainless steel/glass black	134.46 €




Mira corner glass USB A

(E Rost fred

Corner socket element, 2-fold and double USB charger (charging station). Front printed and scratch-resistant glass. for 90° corner.

- stainless steel housing230 V/ 16 A
- 2 x USB charger type A, 5 VDC, IA/I out: 2 x 1050 mA
 273.5 x 80.91 x 80.91 mm (H x W x D)
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back

7053123 stainless steel/glass white	161.70€
7053124 stainless steel/glass black	161.70€

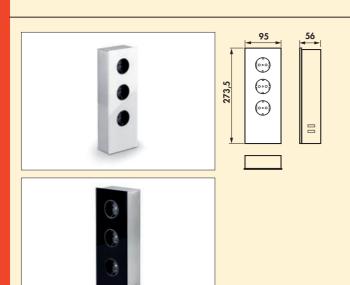

Mira glass USB A



Socket element. 3-fold. With double USB charger (base station). Front in printed and scratch-resistant glass.

- stainless steel housing
- 230 V/16 A
 2 x USB charger type A, 5 VDC, IA/I out: 2 x 1050 mA
- $-273.5 \times 95 \times 56 \text{ mm (H x W x D)}$
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet below


7053056 stainless steel/glass white	164.56 €
7053129 stainless steel/glass black	164.56 €





Mira ES

Elegant and contemporary in design, the Mira socket elements are truely impressive. The surfaces of the elements are easy to clean, hygienic and durable.

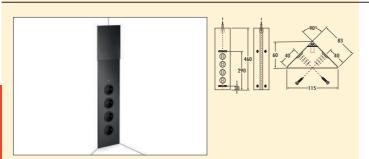

Mira ES1




Corner socket element. 4-fold. With telescopic intermediate piece without end

- 240 V/16 A
- $-460-580 \times 83 \times 83 \text{ mm} (H \times W \times D)$
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back top

7053045 stainless steel	132.30 €
7053235 black matt	134.03 €





Mira ES1 USB A/C



Corner socket element. 4-fold. With telescopic intermediate piece without end caps.

- 240 V/16 A 460-580 x 83 x 83 mm (H x W x D)
- 1 x USB charger type A, 5 VDC, out: 1000 mA
 1 x USB charger type C, 5 VDC, out: 1000 mA
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back top

7053239 stainless steel	201.30 €
7053240 black matt	205.63 €





Corner socket element. 3-fold. With telescopic intermediate piece without end caps, with switch black, for external lighting.

- 240 V/16 A
- $-460-580 \times 83 \times 83 \text{ mm} (H \times W \times D)$
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- 1800 mm switch cable with Euro coupling
- cable outlet back top

7053049 stainless steel	153.92 €
7053236 black matt	155.65 €





Surface mounted, corner sockets


Mira corner



Corner socket element. With telescopic intermediate piece without end caps, for 90° corner.

- stainless steel housing
- $-465-595 \times 81 \times 81 \text{ mm} (H \times W \times D)$
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back top

7053001 3-fold, without switch	127.89 €
7053002 2-fold, with switch for external illumination	143.80 €
7053062 3-fold, without switch, with Swiss sockets	197.41 €

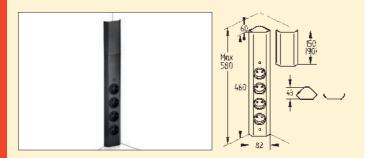


Mira corner small 1



Socket element. 4-fold.

- housing in a compact design with telescopic intermediate piece
- 240 V/16 A
- 460-580 x 59 x 59 mm (H x W x D)
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back top

7053093 stainless steel	126.25 €
7053237 black matt	128.84 €

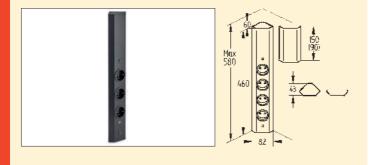


Mira corner small USB A/C



Socket element. 3-fold.

- housing in a compact design with telescopic intermediate piece
- 240 V/16 A
- $-460-580 \times 59 \times 59 \text{ mm} (H \times W \times D)$
- 1 x USB charger type A, 5 VDC, out: 1000 mA
 1 x USB charger type C, 5 VDC, out: 1000 mA
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back top

7053241 stainless steel	195.86 €
7053242 black matt	200.18 €

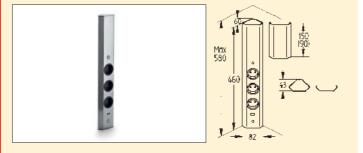

Mira corner small USB A




Socket element. 3-fold.

- stainless steel housing in a compact design with telescopic intermediate piece
- 240 V/16 A
- $-460-580 \times 59 \times 59 \text{ mm (H x W x D)}$
- 1 x USB charger type A, 5 VDC, out: 1000 mA 2000 mm mains connection line, earthed plug supplied loose
- cable outlet back top

7053094 stainless steel 143.55 €







Mira corner glass USB C Snap




Corner socket element. 3-way and **extendable USB C charging cable**. Practical snap-in and snap-out function of the USB-C plug cable in the housing. Front in printed and scratch-resistant glass, for 90° corner.

- aluminium housing, black
- 230 V/16 A
- 1 x USB charger type C, 5 VDC, IA I out: 2050 mA
- 500 mm extendable cable length USB C cable
- $-460 \times 75 \times 57 \text{ mm (H x W x D)}$
- 2000 mm mains connection line, earthing contact plug enclosed loose
- cable outlet behind or below
- suitable for vertical and horizontal mounting

7053203 aluminium black/glass black	219.33 €
7053204 aluminium black/glass white	219.33 €
7053205 aluminium black/stainless steel col.	219.33 €





Mira corner small S




CE Rost

Socket element. 3-fold and switch for external lighting.

- housing in a compact design with telescopic intermediate piece
- 240 V/16 A
- $-460-580 \times 59 \times 59 \text{ mm (H x W x D)}$
- 2000 mm mains connection line, earthed plug supplied loose
- 1800 mm switch cable with Euro coupling
- cable outlet back

7053095 stainless steel	141.82 €
7053238 black matt	146.14 €






Mira ES3

Corner socket element. 2-fold.

- 240 V/16 A
- $-288 \times 83 \times 83 \text{ mm} (H \times W \times D)$
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back below

7053041 with earthed plug sockets, stainless steel	112.41 €
7053141 with earthed plug sockets, black matt	117.60€





Mira ES4




Corner socket element. 2-fold, 240 V/16 A. 1 mini switch 240 V/2 A, for external illumination.

- 288 x 83 x 83 mm (H x W x D)
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- 1800 mm switch cable with Euro coupling
- cable outlet back below

7053042 stainless steel

134.03 €






Mira ES2



Corner socket element. 2-fold.

- 240 V/16 A
- $-200 \times 83 \times 83 \text{ mm} (H \times W \times D)$
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back below

7053040 stainless steel	110.68 €
7053140 black matt	112.41 €




Mira triangle

Corner socket element. 3-fold.

- 240 V/16 A
- 155 x 147 x 147 mm (H x W x D)
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back

7053	3043 stainless steel	116.74 €
7053	3143 black matt	121.06 €





Mira wall




Socket element. With telescopic intermediate piece without end caps.

- stainless steel housing, 230 V/16 A
- $-465-595 \times 100 \times 4\overline{3} \text{ mm (H x W x D)}$
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back top

7053004 3-fold, without switch	130.74 €
7053005 2-fold, with switch for external illumination	144.75 €





Mira wall small




Socket element. 4-fold.

- stainless steel housing in a compact design with telescopic intermediate piece
- 240 V/16 A
- $-460-580 \times 81 \times 42 \text{ mm (H x W x D)}$
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back top

7053090 stainless steel	128.84 €
7053245 black matt	137.92 €





Mira wall small USB A




Socket element. 3-fold.

- stainless steel housing in a compact design with telescopic intermediate piece
- 240 V/16 A
- 1 x USB charger type A, 5 VDC, IA/ I out: 1000 mA
- $-460-580 \times 81 \times 42 \text{ mm} (H \times W \times D)$
- 2000 mm mains connection line, earthed plug supplied loose
- cable outlet back top

7053091 stainless steel

142.68 €





Mira wall small USB A/C



Socket element. 3-fold.

- stainless steel housing in a compact design with telescopic intermediate piece
- 240 V/16 A
- 1 x USB charger type A, 5 VDC, IA/ I out: 1000 mA
- 1 x USB charger type C, 5 VDC, IA/ I out: 1000 mA
- $-460-580 \times 81 \times 42 \text{ mm} (H \times W \times D)$
- 2000 mm mains connection line, earthed plug supplied loose
- cable outlet back top

7053243 stainless steel	194.13€
7053244 black matt	197.59 €




Mira wall small S

CE Rost

Socket element. 3-fold and switch for external lighting.

- stainless steel housing in a compact design with telescopic intermediate piece
- 240 V/16 A
- $-460-580 \times 81 \times 42 \text{ mm} (H \times W \times D)$
- 2000 mm mains connection line, earthed plug supplied loose
- 1800 mm switch cable with Euro coupling
- cable outlet back top

7053092 stainless steel	138.35 €
7053246 black matt	158.24 €



Casia 2K power strip USB A+C



Corner socket element, aluminium. 2-fold. Suitable for vertical and horizontal mounting. — 240 V/16 A

- $-\,$ 1 x USB charger type A, 5 VDC, IA/I out: 1100 mA $-\,$ 1 x USB charger type C, 5 VDC, IA/I out: 1100 mA
- 235 x 78 x 64 mm (H x W x D)
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back

7053247 stainless steel coloured	247.31 €
7053248 black matt	247.31 €



Casia 2L power strip USB A+C


CE

Corner socket element, aluminium. 3-fold. Suitable for vertical and horizontal mounting. With telescopic compensation piece and coverable sockets.

- 240 V/16 A
- 1 x USB charger type A, 5 VDC, IA/I out: 1100 mA
 1 x USB charger type C, 5 VDC, IA/I out: 1100 mA
- $-475 \times 78 \times 64 \text{ mm} (H \times W \times D)$
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back

7053249 stainless steel coloured	323.40 €
7053250 black matt	323.40 €






Mira ES5



Corner socket element. 2-fold. Suitable for vertical and horizontal mounting. - 240 V/16 A

- $-200 \times 59 \times 59$ mm (H x W x D)
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back

7053113 stainless steel	108.09€
7053114 black matt	110.68 €



Corner double socket


Socket element. 2-fold. Stainless steel casing with black socket inserts.

- 220-240V /16 A
- $-152 \times 63.4 \times 63.4 \text{ mm (H x W x D)}$
- cable outlet in the middle
- 2000 mm mains connection line, earthing contact plug enclosed loosely

7031220 stainless steel coloured

89.06 €





Mira WA1

CE Rost free


Socket element. 2-fold. With flip lid.

- 240 V/16 A
- 200 x 83 x 83 mm (H x W x D)
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back

7053048 stainless steel

116.74€





Mira BS1




Socket element. 2-fold. With hinged lid.

Due to its low installation depth, the Mira BS1 is particularly suitable for integration in cabinet covers.

- 230 V/16 A
- $-85 \times 145 \times at least 36 mm (H \times W \times D)$
- 2000 mm mains connection line, earthing contact plug enclosed loosely

7053044 stainless steel	103.76 €
7053115 black matt	105.49 €







Mira ES1 with cover




Socket element, single. With hinged lid.

- 240 V /16 A
- 2000 mm power supply cable, earthed plug loosely enclosed
- stainless steel cover 85 x 85 mm

7053138 stainless steel, lid stainless steel coloured	70.04 €
7053139 black matt, lid anthracite	70.04 €





Mira KST1



Socket element. 2-fold. For cooking islands. Edges welded and milled.

- 240 V/16 A
- drill Ø ca. 23 mm
- 1500 mm mains connection line without earthing contact plug
- cable outlet below

7053047 stainless steel


153.92 €



Evoline® Dock Cuisine

Power supply as a design object, wherever you need it. Easy installation.

Convenient, affordable and easy to clean.



≜ & (€


Socket element. 3-fold. Especially suited for installation below wall-mounted

cabinets or under shelves. - 2 x fastening elements enclosed loosely

- 74 x 165 x 75 mm (H x W x D)
 2500 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back (below/top)

104.45 € 8031133 stainless steel coloured 8031113 black matt 93.39 €





Evoline® R Dock



Socket element. 3-fold. Especially suited for installation below wall-mounted cabinets, shelves or under the work surface.

- housing made of aluminium
- $-70 \times 179 \times 73 \text{ mm (H x W x D)}$
- 2500 mm mains connection line, earthing contact plug enclosed loosely
- attachment set
- cable outlet back (below/top)

8031146 silver coloured 95.38 €

Naber 432/25 EN



Evoline® Wing

The electrical connection right in the drawer: movable and extendable furniture parts can be equipped with the Evoline® Wing cable management system. Available in the variants single socket plus charger and double socket without charger. The cable

duct without socket is also available, as well as the socket element without cable duct.

The system offers individual mounting options, the cable ducting is carried out in a space-saving manner, for example behind the drawer. Cables are neither twisted nor pinched.

Product variants with cable ducting contain fastening elements for furniture parts made of wood and metal. Evoline® Wing is suitable for all types of cables such as HDMI, LAN etc., even wire cords for securing drawer pull-outs can be safely accommodated in the cable duct arm.

Suitable for drawers from 400 mm wide and up to an pull-out length of 590 mm.







Evoline® Wing 1 USB A+C



Socket element inc. cable routing. 1-fold. With 2-fold USB A+C charger (charging station). Mounting elements for wooden and metal furniture items are included in the scope of delivery.

- USB charger type A+C, 5 V, 2100 mA
- 2500 mm mains connection line, two-pin earthed plug supplied loose
- Suitable for drawers from 400 mm wide and up to an pull-out length of 590 mm.

8031192 with earthed plug socket, silver

250.46 €







Evoline® Wing 2



Socket element inc. cable routing. 2-fold. Mounting elements for wooden and metal furniture items are included in the scope of delivery.

- 2500 mm mains connection line, two-pin earthed plug supplied loose
- Suitable for drawers from 400 mm wide and up to an pull-out length of 590 mm.


8031193 with earthed plug sockets, silver

190.16€









Evoline® Wing



Cable routing. Mounting elements for wooden and metal furniture items are included in the scope of delivery.

- L 363 mm (closed)
- D 17 mm (closed)
- suitable for the nBOX drawer system
- Suitable for drawers from 400 mm wide and up to an pull-out length of 590 mm.

8031191 without earthed plug sockets, black matt

65.89 €



CON-AKTIV®

Muzak column USB A

CE


Socket loudspeaker combination with Bluetooth® port and USB charger (base station) for wall mounting. Simple coupling of different mobile devices such as mobile phones or tablets for music playback.

Socket element, 2-fold. With telescopic intermediate piece without end caps.

- stainless steel coloured aluminium casing with plastic end caps, 230 V/16 A
- 1 x USB charger type A, 5 VDC, IA/I out: 1000 mA
- $-480-540 \times 85 \times 48 \text{ mm} (H \times W \times D)$
- 1900 mm mains connection line, earthing contact plug enclosed loosely
- cable outlet back below

8031153 with earthed plug sockets

276.36 €



Double electrical box



Socket element. 2-fold. With protective lid for increased safety. Convenient functional element for electrical power on the level of the worktop.

- $-65 \times 320 \times 55 \text{ mm } (H \times W \times D)$
- with Wieland plug-in connector (without mains connection line)
- mains connection line 2 (7011134) order separately
- cable input right

When installing several electrical boxes next to each other, a minimum spacing of 100 mm between the electrical boxes is to be observed.

2015003 aluminium coloured	114.74 €
Optional accessories	
7011134 Mains connection line 2, white, L 2000 mm	24.90 €





Corner box 3



Socket element. 2-fold.

— 140 x 85 x 85 mm (H x W x D)

— 1500 mm mains connection line without plug, 3-wire with free ends

7033072 white	58.11 €
7033073 aluminium metallic	65.63 €

Socket

CON-AKTIV®

Retracting sockets

Ready to use in a jiffy



Evoline® Port Page 438 Hole saw Page 439 Elevator Page 440-441 Hole saw Page 441 VersaLift Page 442 Hole saw Page 443 Piccolino Page 444 Hole saw Page 445



Evoline® Port

Order no. Item/

Description

Concealed energy box for wall-mounted cabinets or worktops. Easy, guided extraction through an easy-to-press button which also guides the cable neatly when reclosing.




reddot award









Evoline® Port 1



Energy box. Concealed. With 3 sockets for wall-mounted cabinets or worktops. Easy, guided extraction thanks to an easy-to-press button which also guides the cable neatly when reclosing.

- H 280 mm, extended H 210 mm
- 2500 mm mains connection line, earthing contact plug enclosed loosely
- drill Ø ca. 102 mm
- cable outlet below

8031130 with earthed plug socket, lid silver coloured	151.23 €
8031174 with earthed plug socket, lid and profile black matt	188.85 €



Evoline® Port USB C




Energy box. Concealed. With 2 sockets and 1 USB charger (charging station) for wall-mounted cabinets or worktops. Easy, guided extraction thanks to an easy-to-press button which also guides the cable neatly when reclosing.

- H 250 mm, extended H 175 mm
- 1 x USB charger type C, 5 VDC, IA/I out: 2100 mA
- 2500 mm mains connection line with earthing contact plug
- drill Ø ca. 102 mm
- cable outlet below


8031278 lid silver coloured

192.35 €





Evoline® Port 2



Energy box. Concealed. With 3 sockets for wall-mounted cabinets or worktops. Easy, guided extraction thanks to an easy-to-press button which also guides the cable neatly when reclosing.

- H 280 mm, extended H 210 mm
- 2500 mm mains connection line, earthing contact plug enclosed loosely
- drill Ø ca. 102 mm
- cable outlet below

8031131 with earthed plug sockets, lid stainless steel

315.01 €





Hole saw

Order no. Item/ Description



- material HSS for wood/plastic
 cutting depth up to 38 mm
 with reception tool incl. centre drill

7053158 Ø 102 mm, for Evoline® Port

66.94 €

CON-AKTIV® Retracting sockets



Elevator

Socket element. Retractable. For wall cabinets or worktops. Following gentle pressure on the cover, the unit extends from a spring mechanism and offers a convenient and safe electricity supply. Simple and flush retraction when not in

- extends at the touch of a finger

Description

- up to 3 sockets

Order no. Item/

- quick and easy installation
- retrofitting possible
- classic design
- USB Charger







Socket element. Retractable. With 3 sockets (1 \times earthing contact, 2 \times Euro flat socket) for hanging cabinets or worktops.


- material plastic, black
- profile aluminium
- covers stainless steel coloured, punched and brushed
- 2000 mm mains connection line, earthing contact plug separately enclosed
- drill Ø ca. 80 mm
- for panel thickness from 16 mm to 60 mm, mounted by screw ring
- cable outlet below

7053030 stainless steel coloured

159.97 €

CE





Elevator 2

Socket element. Retractable. With 2 Schuko sockets for hanging cabinets or

- worktops. - material plastic, black
- profile aluminium
- covers stainless steel coloured, punched and brushed
- 2000 mm mains connection line, Schuko plug separately enclosed
- for panel thickness from 16 mm to 60 mm, mounted by screw ring
- cable outlet below

7053065 with earthed plug sockets	159.97 €
7053060 with Belgian/French sockets	167.76 €
7053064 with Swiss sockets	185.91 €





Elevator USB A

Socket element. Retractable. With one Schuko socket and double USB charger (charging station) for hanging cabinets or worktops.

- material plastic, black

- profile aluminium
 covers stainless steel coloured, punched and brushed
 2 x USB charger type A, 5.2 VDC, IA/I out: 2 x 1075 mA
- 2000 mm mains connection line, earthing contact plug separately enclosed
- drill Ø ca. 80 mm
- for panel thickness from 16 mm to 60 mm, mounted by screw ring
- cable outlet below

7053066 stainless steel coloured

252.50 €





Hole saw

Œ

- material HSS for wood/plastic
- cutting depth up to 38 mmwith reception tool incl. centre drill

7053053 Ø 80 mm, for Elevator, VersaLift, Circle 80

49.51 €

CON-AKTIV®



VersaLift

Order no.

Item/


Description

An innovative, IP54-certified, retractable socket tower for kitchens which, with a diameter of just 80 mm, combines a minimalist, typically Italian design with great functionality. Easy and flush retraction when not in use thanks to the soft-action mechanism.

VersaLift is a retractable electric tower that can be installed quickly and without screws and is just screwed on with a simple ring nut. Thanks to its Plug&Play capability, it can be put into operation immediately after installation without the need for any further configuration.

- slides out at the touch of a finger
- up to 2 sockets
- simple and quick installation
- retrofitting possible
- contemporary design
- USB A/C charger
- − IP 54





VersaLift USB A/C




Socket element. Retractable. With 2 sockets and USB A/C charger for wall cabinets or worktops.

- 3400 watt/16 A, 220-250 VAC, IP54
- double USB charger type A+C, 5 V, 3,0 A
- material plastic, black
- 2000 mm mains connection line, earthing contact plug enclosed loose
- drill Ø ca. 80 mm
- for panel thickness from 16 mm to 60 mm, attachment by screw ring
- cable outlet below

7053265 brushed stainless steel	236.13 €
7053266 acrylic glass, black matt	256.30 €
7053268 acrylic glass, white matt	256.30 €
7053267 gunmetal	244.54 €





VersaLift USB A/C QI

CE

Socket element. Retractable. With 2 sockets and USB A/C charger and QI charging function for wall cabinets or worktops.

- 3400 watt/16 A, 220-250 VAC, IP54
- double USB charger type A+C, 5 V, 3,0 A
- Qi inductive charging station in the cover (wireless charger). Wireless charging of mobile phones using the Qi standard.
- material plastic, black
- 2000 mm mains connection line, earthing contact plug enclosed loose
- drill Ø ca. 80 mm
- for panel thickness from 16 mm to 60 mm, attachment by screw ring
- cable outlet below

7053269 acrylic glass, black matt

300.00 €





Hole saw



- material HSS for wood/plasticcutting depth up to 38 mmwith reception tool incl. centre drill

7053053 Ø 80 mm, for Elevator, VersaLift, Circle 80

49.51 €

CON-AKTIV® Retracting sockets



Piccolino

Order no. Item/


Socket element. Retractable. For wall cabinets or worktops. Given light pressure on the cover, the unit slides out via a spring mechanism to provide a convenient and safe power supply. Simple and flush retraction when not in use. The Piccolino can therefore be installed above drawers without any problems.

The Piccolino telescopes when closed, giving it an overall depth of less than 48 mm and is also splash-proof when closed.

- $\boldsymbol{-}$ spring-controlled pop-up mechanism at the touch of a finger
- simple and quick installation

Description

- retrofitting possible
- very low installation depth
- flush installation possible
- IP44 when closed

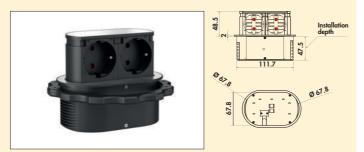

Piccolino


Œ

Socket element. Retractable. With 2 Schuko sockets for hanging cabinets or

- material plastic, black
- Blende Edelstahl oder schwarz matt
- 2000 mm mains connection line with Schuko plug
- drill Ø ca. 68 mm
- for panel thickness from 16 mm, mounted by screw ring
- cable outlet below

7053198 cover stainless steel	125.38 €
7053199 cover black matt	134.03 €





Piccolino QI

CE

Socket element. Retractable. With 1 earthed socket, double USB charger A/C and QI charging function in the lid. For installation in worktops.

- material plastic, black
- cover matt black glass
- 1 x USB charger type A, 5 VDC,IA/I out: 1100mA
- 1 x USB charger type C, 5 VDC,IA/I out: 1100mA
- 2000 mm mains connection line with earthed plug
- drill Ø ca. 68 mm
- for worktop thicknesses from 16 mm, fixing via threaded ring
- cable outlet underneath

7053201 cover in matt black glass

195.94 €

(E





Hole saw

Order no. Item/ Description

material HSS for wood/plasticcutting depth up to 38 mmwith reception tool incl. centre drill

7053168 Ø 68 mm, for Piccolino 51.62€

Socket

CON-AKTIV® Flush mounted sockets



Perfectly integrated

Evoline® BackFlip	Page 448
Evoline® FlipTop Push	Page 449
Evoline® Square-USB	Page 450
Evoline® Qi	Page 451
Evoline® Circle80	Page 452
Hole saw	Page 452
Twist plug socket	Page 453
Twist 2 plug socket	Page 454
Duplex	Page 455
Hole saw	Page 456
Smile double socket	Page 457
Hole saw	Page 457
Kapsa	Page 458
Versalid	Page 459
Due double socket	Page 460
Pix single socket	Page 460
Hole saw	Page 460
Evoline® One	Page 461-462
Hole saw	Page 463
VersaDot Lite	Page 464
Hole saw	Page 464
VersaHit Mono	Page 465
VersaHit Dual	Page 466



Evoline® BackFlip

When closed, Evoline® BackFlip is just a thin plate on the work surface. At the touch of a finger it turns by 180 degrees and shows its useful side: USB charger and socket are high enough above the plate that they are protected from water.

The installation depth is nevertheless only 53 mm, so it can also be mounted above drawers or devices.

Equipped with new surfaces, Evoline® BackFlip is available in glas black, lacquered black and stainless steel.














Evoline® BackFlip USB C



Socket element. 2-fold. Rotating with USB C charger (base station).

- installation depth 53 mm
- cut-out dimensions ca. 215 x 88 mm
- 1 x USB charger type C, 5 VDC, IA/I out: 2100 mA
- 2500 mm mains connection line, earthing contact plug enclosed loosely
- flush-mountable
- cable outlet back left

8031186 with earthed plug sockets, flush-mount H 2,6 mm, stainless steel	189.72 €
8031187 with earthed plug sockets, flush-mount H 2,6 mm, painted black	293.31 €
8031188 with earthed plug sockets, flush-mount H 5 mm, glass black	380.38 €
8031279 with earthed plug sockets, flush-mount H 5 mm, glass black matt	369.66 €
8031271 with Belgian/French sockets, flush-mount H 2,6 mm, stainless steel	220.67 €

Will Deiglan, French sockers, host moon in 2,0 min, siamess sieer	
8031270 with Belgian/French sockets, flush-mount H 2,6 mm, stainless steel	292.10 €
8031272 with Belgian/French sockets, flush-mount H 5 mm, glass black	418.49 €
2001070 21 C 2 1 1 11 1 11 10 / 11 1 1	01/01/6

80312/3 With Swiss sockers, flush-mount H 2,0 mm, stainless steel	210.81 €
8031274 with Swiss sockets, flush-mount H 2,6 mm, painted black	314.45 €
8031275 with Swiss sockets, flush-mount H 5 mm, glass black	415.13 €



Evoline® FlipTop Push

This socket element enables the flexible installation of sockets in the worktop (up to 50 mm thickness). The cover opens automatically at a light touch.















Evoline® FlipTop Push


- flush-mountable

Lid and frame made of stainless steel.


3000 mm mains connection line with earthing contact plug
 installation depth 68 mm











Order no. Item/ Description

Evoline® Square USB C




Socket element. 1-fold. With USB charger (charging station). When closed, the element is almost flush with the worktop. The socket is exposed by sliding the

- installation depth 68 mm
- sliding cover coated in stainless steel colour
- 1 X USB charger type C, 5 VDC, IA I out: 2100 mA
- 2500 mm mains connection line, earthing contact plug enclosed loose
- drill Ø ca. 80 mm
- cable outlet below

8031277 with earthed plug socket

103.36 €





Evoline® Square USB C Qi



Socket element. 1-fold. With USB charger (charging station). When closed, the element is almost flush with the worktop. The socket is exposed by sliding the

- Qi inductive charging station in the cover (wireless charger). Wireless charging of the mobile phones using the Qi standard.
- installation depth 68 mm
- sliding cover coated in stainless steel colour
- 1 X USB charger type C, 5 VDC, IA I out: 2100 mA
- 2500 mm mains connection line, earthing contact plug enclosed loose
- drill Ø ca. 80 mm
- cable outlet below

8031276 with earthed plug socket

285.71 €




Evoline® Qi Wireless Charger

With the Evoline® Qi Wireless Charger, Qi-enabled devices can be charged without cable and other accessories. The device to be charged is simply placed on the corresponding area of the worktop – minimalism pure.







Evoline® Qi Wireless Charger

Charging coil. Installation unit \varnothing 80 mm with a Qi wireless coil. Mains connection cable with EU adapter. For integration in the table top or for installation in


- table openings Ø 80 mm. - the device is certified in accordance with WPC standard 1.2.2 Qi
- operating voltage 5 V
 charging power max. 10 W
- external power supply wall plug transformer 230 V
- 1500 mm supply line
- with invisible installation plate thickness max. 3 mm
 installation without cover

8031175 black matt

199.83 €



 $\nabla \nabla$





Socket element. With USB charger (charging station). When closed, the element is almost flush with the worktop. By turning the lid, the socket and the USB charger are exposed.

- installation depth 48.5 mm
- rotating lid black

Order no. Item/

- double USB charger type A+C, 5 V, 2,1 A
- 2500 mm mains connection line, earthing contact plug enclosed loose
- drill Ø ca. 80 mm
- board thickness from 10 mm
- without lid, flush installation is possible
- cable outlet below

8031114 with earthed plug socket, USB A/C

159.10€







Socket element. With USB charger (charging station). When closed, the element is almost flush with the worktop. By turning the lid, the socket and the USB charger are exposed.

- Qi inductive charging station in the lid (wireless charger). Wireless charging of mobile phones based on the Qi standard with a maximum of 15 watts and magnetic function.
- external power supply plug for Qi charging function enclosed loose, for which an additional socket is required
- installation depth 48.5 mm
- rotating lid black
- double USB charger type A+C, 5 V, 2,1 A
- 2500 mm mains connection line, earthing contact plug enclosed loose
- drill Ø ca. 80 mm
- board thickness from 10 mm
- cable outlet below

8031115 with earthed plug socket, USB A/C

292.27 €





Hole saw

CE

- material HSS for wood/plastic
- cutting depth up to 38 mm
- with reception tool incl. centre drill

7053053 Ø 80 mm, for Elevator, Versalift, Circle 80

49.51 €

Œ

CE



Twist plug socket


The double socket is suitable for installation in kitchen worktops made of wood, laminate, stone or glass. Rotating the cover by 90° enables access to two earthing contact sockets that provide a convenient and stable power supply. The fixing is carried out using two mounted hexagon socket head cap screws M6 and clamping claw for or two clamping screws with hexagon socket M6. The cable can be routed downwards or sideways. 1.5 mm² black and cable end sleeves. Plastic casing with cover in nickel-plated die-cast zinc, brushed stainless steel coloured.

Since the installation depth is only 40 mm, installation above drawers is possible.

Please observe installation instructions!

- very low installation depth (approx. 40 mm)
- compact design (H x Ø approx. 42.5 x 115 mm)
- space-saving cable management
- simple and quick mounting
- retrofitting possible
- integrated water drainage











Twist double plug socket



- 3680 watt/16 A, 250 VAC, IP20
- H05VV-F 3G1
- 3-pin with earthing contact
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- drill Ø 105 mm, for board thicknesses from 8 mm
- increased contact protection
- cable outlet below side

7053021 with earthed plug sockets, stainless steel coloured	129.71 €
7053075 with earthed plug sockets, black matt	162.56 €
7053076 with earthed plug sockets, white matt	162.56 €
7053025 with Belgian/French sockets, stainless steel coloured	154.78 €
7053085 with Belgian/French sockets, black matt	161.70€
7053086 with Belgian/French sockets, white matt	161.70€
7053059 with Swiss sockets, stainless steel coloured	157.38 €
7053189 with Swiss sockets, black matt	189.37 €





Twist USB A

Socket element. 1-fold and double USB charger (charging station).

- -3680 watt/16 A, 250 VAC, IP20
- 2 x USB charger type A, 5 VDC, IA/I out: 2 x 1550 mA
- H05VV-F 3G1
- 3-pole with earthing contact
- 2000 mm mains connection line, with earthed plug enclosed loose
- drill Ø 105 mm, for plate thickness from 8 mm
- increased contact protection
- cable outlet rear side

7053170 with earthed plug socket, stainless steel col.	184.18 €
7053171 with earthed plug socket, black matt	209.26 €
7053172 with earthed plug socket, white matt	209.26 €
7053173 with Belgian/French socket, stainless steel coloured	184.18 €
7053174 with Belgian/French socket, black matt	209.26 €
7053175 with Belgian/French socket, white matt	209.26 €





Twist 2 plug socket

Item/

Description

Order no.

With its rounded corners, the high-quality square design variant of the Twist double socket blends harmoniously into kitchen worktops made of wood, laminate, natural stone or glass. The replaceable lid makes it easy to clean.

The automatic and cushioned opening of the slightly recessed cover allows convenient access to two earthed sockets or an additional USB A/C charger with quick-charging function.

Fixation via two clamping claws. Cable routing can be downwards or to the side. Plastic housing with replaceable cover made of die-cast zinc. As the installation depth is only approx. 40 mm, it can easily be installed above drawers.

- very low installation depth (approx. 40 mm)
- pre-mounted for plate thickness 25-40 mm
- by changing the fastening plates also for plate thickness 6-24 mm
- space-saving cable routing
- retrofitting possible, quick and easy installation
- removable lid for cleaning or subsequent replacement
- automatically cushioned opening mechanism
- integrated water outlet





Twist 2 double plug socket




Socket element. 2-fold.

- 3680 watt/16 A, 250 VAC, IP20
- H05VV-F 3G1
- 3-pin with earthing contact
- with earthed plug sockets
- 2000 mm mains connection line, earthing contact plug enclosed loosely
- drill Ø 105 mm, for board thicknesses from 6-40 mm
- increased contact protection
- anti-fingerprint coating
- cable outlet below side

7053190 round, Ø 115, D ca. 45 mm, stainless steel coloured	216.17 €
7053191 square, L 115, B 115, D ca. 45 mm, stainless steel coloured	216.17 €
7053194 round, Ø 115, D ca. 45 mm, black matt	285.35 €
7053195 square, L 115, B 115, D ca. 45 mm, black matt	285.35 €





Twist 2 USB A+C



409.01 €

Socket element. 1-fold and double USB charger A+C (charging station).

- 3680 watt/16 A, 250 VAC, IP20
- 1 x USB charger type A, 5 VDC, IA/I out: 1 x 3000 mA
- 1 x USB charger type C
- 3-pole with earthing contact
- 2000 mm mains connection line, with earthed plug enclosed loose
- drill Ø 105 mm, for plate thickness from 6–40 mm
- dimensions: round (H x W Ø 45 x 115 mm), square (H x W x L approx. 45 x 115 x 115 mm)

7053197 square, with earthed plug socket, black matt

- increased contact protection
- anti-fingerprint coating
- cable outlet rear side

7053192 round, with earthed plug socket, stainless steel coloured	339.83 €
7053193 square, with earthed plug socket, stainless steel coloured	339.83 €
7053196 round with earthed plug socket black matt	409.01 €







Duplex


The built-in socket is made for use in almost all known kitchen worktops. It opens and closes simply - at the touch of a button. Both the fixed cover and the opening inner element are made of stainless steel.

Extremely simple installation – working from above with the Duplex built-in socket open, it is screwed or glued to the worktop with silicone using two clamping

Since the installation depth is only approx. 48 mm, installation via drawers is possible without any problems.

- angular design: 118 x 118 (H x W)
- round design: Ø 118 mm

Please follow the installation instructions!




Duplex double socket



Socket element. Double. Electric opening at the push of a button.

- -3680 watt/ 16 A, 250 VAC, IP20
- H05VV-F 3G 1.5 mm2
- 3-pole with earthing contact
- 2000 mm mains connection line with earthing contact plug
- drill Ø 105 mm
- installation depth approx. 48 mm
- increased contact protection
- space-saving cable routing (downwards or side cable outlet)
- simple and quick installation
- retrofitting possible
- integrated water drain

7054003 square, with earthed plug sockets, stainless steel	164.29 €
7054005 square, with earthed plug sockets, black matt	181.59€
7054001 round, with earthed plug sockets, stainless steel	164.29 €
7054008 round, with earthed plug sockets, black matt	181.59 €

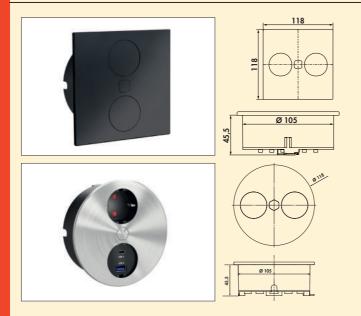

Duplex USB A+C



Socket element. Single and double USB A+C charger (charging station). Electric opening at the push of a button.

- 1 x USB charger type A, 5 VDC, IA/I out: 1 x 2100 mA
 1 x USB charger type C, 5 VDC, IA/I out: 1 x 3000 mA
- 3680 watt/16 A, 250 VAC, IP20
- H05VV-F 3G 1.5 mm2
- 3-pole with earthing contact
- 2000 mm mains connection line with earthed plug
- drill Ø 105 mm
- installation depth approx. 48 mm
- increased contact protection
- space-saving cable routing (downwards or side cable outlet)
- simple and quick installation
- retrofitting possible
- integrated water drain

7054004 square, with earthed plug socket, stainless steel	219.64 €
7054006 square, with earthed plug socket, black matt	236.06 €
7054002 round, with earthed plug socket, stainless steel	219.64 €
7054007 round, with earthed plug socket, black matt	236.06 €

 $CON\text{-}AKTIV^{\circledR} \ \ \text{Flush mounted sockets}$





Order no. Item/ Description


Hole saw

material HSS for wood/plasticcutting depth up to 38 mmwith reception tool incl. centre drill

7053024 Ø 105 mm, for Twist and Duplex

75.59 €

(E





Smile double socket USB

Description

Order no. Item/


The Smile double socket is suitable for the worktop and the rear wall. The swivelling safety glass cover glass cover (optionally in white or black) is heat-resistant and can e.g be used as a storage space for hot pots when closed.

Since the installation depth is only approx. 40 mm, installation via drawers is possible without any problems.

Please follow the installation instructions!







Smile double socket USB A

Œ

Socket element. Double with USB charger (charging station) incl. storage shelf.

- plastic housing
- with round swivelling safety glass cover glass cover Ø 152 mm
- 1 x USB charger type A, 5 VDC, I/Al out: 1 x 2100 mA
 1800 mm mains connection line, earthed plug supplied loose
- drill Ø 127 mm, for plate thicknesses from $20\ \text{mm}$
- installation depth approx. 40 mm
- $\boldsymbol{-}$ by exchanging the enclosed clamps, also suitable for plate thicknesses from
- increased contact protection
- cable outlet below side

7053148 glass black

159.79 €





Hole saw

CE

- material HSS for wood/plastic
- cutting depth up to 38 mm
- with reception tool incl. centre drill

7053149 \varnothing 127 mm, for Smile double socket

81.71 €





Order no. Item/

Built-in socket element with elegant and shapely stainless steel coloured aluminium cover, which particularly protects against dust and dirt. Attachment is carried out using two mounted clamping claws for a board thickness of 30-40 mm.

— aluminium lid in high-quality look

Description

- low installation depth (approx. 45 mm)
- retrofitting possible from above







CE

Socket element. 3-fold. For installation in worktop, front panel orside wall.


- cut-out dimensions ca. 189 x 53 mminstallation depth approx. 45 mm
- 2000 mm mains connection line, two-pin earthed plug supplied loose
- cable outlet below left

7053068 with two-pin earthed plugs, lid stainless steel coloured	183.32 €
7053077 with two-pin earthed plugs, lid black matt	214.44 €
7053078 with two-pin earthed plugs, lid white	214.44 €
7053083 with Belgian/French sockets, lid stainless steel coloured	211.85€









187,9



Kapsa USB A

Socket element, 2-fold and double USB charger (charging station). For installation in worktop, front panel or side wall.

- cut-out dimensions ca. 189 x 53 mm
 installation depth approx. 45 mm
- 2 x USB charger type A, 5.2 VDC, IA/I out: 2 x 1075 mA
- 2000 mm mains connection line, two-pin earthed plug supplied loose
- cable outlet below left


7053069 with two-pin earthed plugs, lid stainless steel coloured	214.44 €
7053079 with two-pin earthed plugs, lid black matt	255.09 €
7053080 with two-pin earthed plugs, lid white	255.09 €
7053084 with Belgian/French sockets, lid stainless steel coloured	242.11 €



VersaLid

Built-in socket unit with elegant, attractively shaped anodised aluminium cover, which effectively protects against dust and dirt. Secured by two mounted clamping claws for a panel thickness of 15 mm or more.

- aluminium cover with high-quality finish
- low installation depth (approx. 51 mm)
 can be retrofitted from above

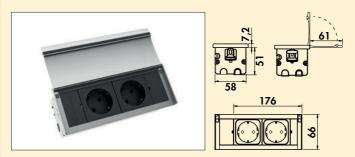


VersaLid

CE

Socket element. 2-fold. For installation in worktop, front panel or side wall.

- cut-out dimensions approx. 167 x 59 mm
- installation depth approx. 51 mm
- for panel thickness from 15mm
- 2000 mm mains connection line, earthing contact plug enclosed loose
- cable outlet can be horizontal and vertical at the bottom

7053270 lid aluminium anodised	166.39 €
7053271 lid white matt	166.39 €
7053272 lid black matt	166.39 €

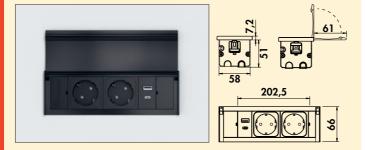

VersaLid USB A/C


CE

Socket element, 2-fold and USB A/C charger (charging station). For installation in worktop, front panel or side wall.

- cut-out dimensions approx. 193 x 59 mm
 installation depth approx. 51 mm
- for panel thickness from 15mm
- 1 X USB charger type A, 5.2 VDC, IA/I out: 1 x 1500 mA
 1 X USB charger type C, 5.2 VDC, IA/I out: 1 x 1500 mA
- 2000 mm mains connection line, earthing contact plug enclosed loose
- cable outlet can be horizontal and vertical at the bottom

7053273 lid aluminium anodised	224.37 €
7053274 lid white matt	224.37 €
7053275 lid black matt	224.37 €









Due double socket

Order no. Item/

CE

Socket element. 2-fold. With sliding lid. For installation in worktop, front panel or side wall.


- drill Ø 2 x 56 mm
- installation depth ca. 45 mm

Description

- 2000 mm mains connection line, two-pin earthed plug supplied loose
- incl. drilling template
- lids can be opened separately
- cable outlet below centre

7053067 with two-pin earthed plugs, stainless steel coloured	112.41 €
7053081 with two-pin earthed plugs, black	114.14€
7053082 with two-pin earthed plugs, white	114.14€





Pix single socket

CE

Socket element, 1-fold. Ornamental ring stainless steel coloured, black and white. For installation in worktop, front panel or side wall.

- drill Ø 56 mm
- installation depth ca. 45 mm
 2000 mm mains connection line, two-pin earthed plug supplied loose (permanently installed in swiss version)
- cable outlet back

74.80 €
75.23 €
74.62 €
24.47 €
14.79 €
14.79 €







Hole saw

CE

- material HSS for wood/plastic
- cutting depth up to 38 mm
- with reception tool incl. centre drill

7053153 Ø 57 mm, for Pix

43.89 €



















Evoline® One single socket

Description



Socket element, 1-fold. For installation in the worktop, front panel or side wall.


- drill Ø 54 mm

Order no. Item/

- installation depth 50 mmfor plate thicknesses from 9 mm
- 2500 mm mains connection line, two-pin earthed plug supplied loose
- socket with contact protection
- flush mounting possible
- cable outlet on the side or bottom

80.85 €
88.98 €
19.63 €
11.33 €















Evoline® One double USB A+C



Socket element. Double USB charger A+C (charging station). For installation in the worktop, front panel or side wall. — drill Ø 54 mm

- installation depth 50 mm
 for plate thicknesses from 9 mm
- USB charger type A+C, 5 V, 2.1 A
- 2500 mm mains connection line, two-pin earthed plug supplied loose
 flush mounting possible
- cable outlet on the side or bottom

157.63 €
.57.100 €
19.63 €
11.33 €

CON-AKTIV®




Order no. Item/ Description


Evoline® One DisQ


Charging system for USB C and inductive charging. The One DisQ is ideal for charging wired and inductive smartphones.

The One's USB C modules remain free during the charging process and can be used for other applications at the same time.









Charging station. When closed, the element is almost flush with the worktop. The socket is exposed by turning the lid.

- with support surface for Qi inductive charging (wireless charger). Wireless
 charging of mobile phones using the Qi standard with a maximum of 15 watts
 and magnetic holding function
- external plug-in power supply for Qi charging function enclosed loose, for which an additional socket is required
- drill Ø 54 mm
- installation depth 50 mm
- rotating lid black
- 2500 mm mains connection line, two-pin earthed plug enclosed loose
- for worktop thicknesses from 9 mm
- cable outlet rear side

8031280 with earthed plug sockets, black matt

261.85 €

150,5

Evoline® One DisQ USB A+C Qi



Charger (base station). With USB A and C charging sockets. When closed, the element is almost flush with the worktop. The USB charging sockets are exposed by turning the lid.

- with support surface for Qi inductive charging (wireless charger). Wireless charging of mobile phones using the Qi standard with a maximum of 15 watts and magnetic holding function
- external plug-in power supply for Qi charging function enclosed loose, for which an additional socket is required
- drill Ø 54 mm
- installation depth 50 mm
- rotating lid black
- USB charger type A+C, 5 V, 2.1 A
- 2500 mm mains connection line, two-pin earthed plug enclosed loose
- for worktop thicknesses from 9 mm
- cable outlet rear side

8031281 black matt

329.58 €







Hole saw



- material HSS for wood/plasticcutting depth up to 38 mmwith reception tool incl. centre drill

Order no. Item/ Description

7053159 Ø 54 mm, for One

42.93 €



VersaDot Lite

Order no. Item/

The VersaDot Lite is a compact solution which provides standard electrification on all worktops or tables. Thanks to the small space requirement above and below the worktop and the special attachment system, the VersaDot Lite is quick and easy to install and remove.

The VersaDot Lite socket module has a coupling/decoupling system with two tabs at the back which allow the product to be attached to the panel from above in seconds, saving the fitter valuable time.

- low installation depth (approx. 56 mm)
- can be retrofitted from above

Description



VersaDot Lite single socket



Socket element. 1-fold. For installation in worktop, front panel or side wall.

- drill-Ø 60 mm
- installation depth 50 mm
- for panel thicknesses from 5 mm
- 2500 mm mains connection line with earthing contact plug
- socket with touch protection
- flush installation possible
- cable outlet at the bottom

7053263 ring, white matt	47.06 €
7053264 ring, black matt	47.06 €





Hole saw

- material HSS for wood/plastic
- cutting depth up to 38 mm
- with reception tool incl. centre drill

7052166 Ø 60 mm, for VersaDot Lite


47.38 €

CE



VersaHit Mono

The double socket element VersaHit Mono offers a variety of connection options in a flush-designed housing. The sliding double covers reveal the sockets with slight pressure. For universal installation in worktop, front panel or side wall. The sockets are splash-proof in accordance with IP54.

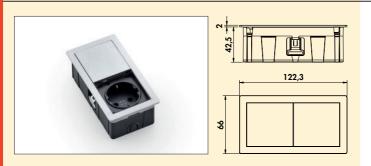

VersaHit Mono

(€

Socket element. 1-fold. Built-in socket with sliding cover. - 3400 watts/16 A, 220–250 VAC, IP54

- $-66 \times 123 \times 40 \text{ mm} (W \times L \times D)$
- cut-out dimensions approx. 114 x 58 mm, R 4 mm
 2000 mm mains connection line, earthing contact plug supplied loosely
- very low installation depth (ca. 40 mm)
- increased contact protection

7053164 brushed stainless steel	152.94 €
7053165 black matt	152.94 €
7053258 white matt	152.94 €
7053257 gunmetal	158.40 €



VersaHit Mono Combi USB A/C

CE

Socket element. 1-fold. Built-in socket with sliding cover and USB A/C charger.

- 3400 watt/16 A, 220-250 VAC, IP54
- double USB charger type A+C, 5 V, 2,4 A 66 x 237 x 40 mm (W x L x D)
- cut-out dimensions approx. 229 x 58 mm, R 4 mm
- 2000 mm mains connection line, earthing contact plug enclosed loose
- very low installation depth (approx. 40 mm)
- increased touch protection

'	
7053259 brushed stainless steel	205.04 €
7053260 black matt	205.04 €
7053262 white matt	205.04 €
7053261 gunmetal	217.65 €




VersaHit Dual

Order no. Item/

Description

The double socket element VersaHit Dual offers a variety of connection options in a flush-designed housing. The sliding double covers reveal the sockets with slight pressure. For universal installation in worktop, front panel or side wall. The sockets are splash-proof in accordance with IP54.



VersaHit Dual


Œ

Socket element. 2-fach. Built-in socket with double sliding cover.

- 3400 watts/16 A, 220-250 VAC, IP54 117 x 117 x 40 mm (W x L x D)

- cut-out dimensions approx. 108 x 108 mm, R 4 mm
 2000 mm mains connection line, earthing contact plug supplied loosely
- very low installation depth (ca. 40 mm)
- increased contact protection

7053160 brushed stainless steel	178.15 €
7053161 black matt	178.15 €
7053254 white matt	178.15€
7053253 gunmetal	189.92 €



VersaHit Dual USB A/C

CE

Socket element. 1-fold. With double USB charger (charging station). Built-in socket with double USB charger.

- 3400 watts/16 A, 220-250 VAC, IP54
- $-117 \times 117 \times 40/50 \text{ mm (W x L x D)}$
- cut-out dimensions approx. 108 x 108 mm, R 4 mm
- 2000 mm mains connection line, earthing contact plug supplied loosely
 double USB charger type A+C, 5 V, 2,4 A
- very low installation depth (ca. 40 mm)
- increased contact protection

7053251 brushed stainless steel	205.04 €
7053252 black matt	205.04 €
7053256 white matt	205.04 €
7053255 gunmetal	217.65€